


PRODUCT DETAIL :

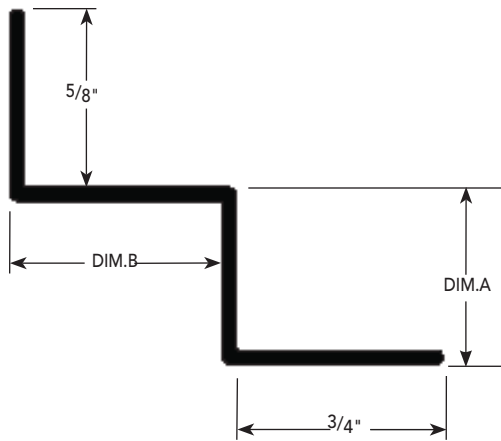

USAGE

Fry Reglet "W" Molding provides a reveal at wall/ceiling terminations. Available vented for air flow between room and plenum. Also provides support for many types of ceiling systems.


GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet "W" Molding, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with chemical conversion coating, clear anodized or other specified finish. Refer to finish section.

"W" MOLDING SIZES

DIM. A REVEAL DEPTH	DIM. B REVEAL WIDTH	NUMBER	
		NON-VENTED	VENTED
1/2"	1/2"	WDM-50-50	WDM-50-V-50
1/2"	3/4"	WDM-50-75	WDM-50-V-75
5/8"	3/4"	WDM-625-75	WDM-625-V-75
3/4"	3/4"	WRM-75-75	WRM-75-V-75

INSTALLATION DETAIL : Cross Section

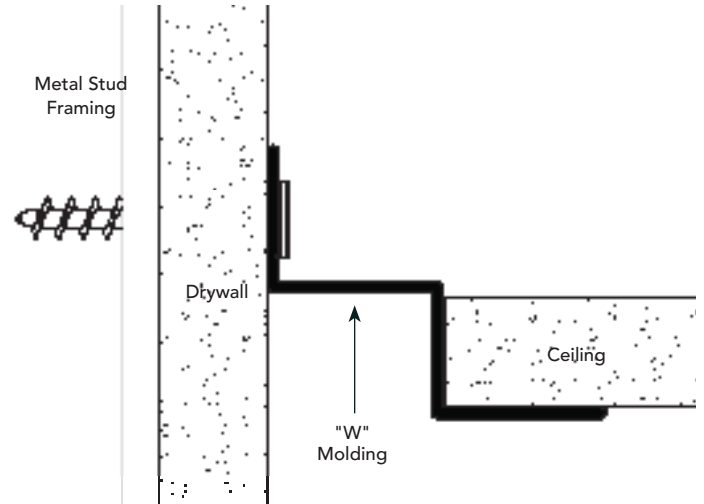

INSTALLATION DETAIL : ISO View

